




## **RFID** 3.375" × 2.125"

**Bleed Area** 3.625" × 2.375"

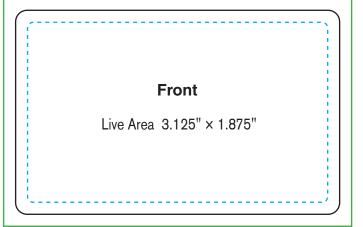

Please note that RFID keycards do not require a directional arrow.

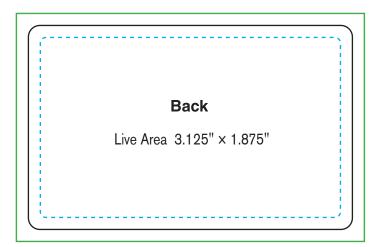

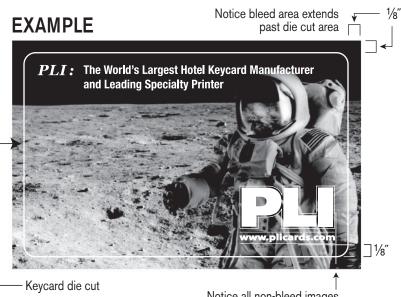

Notice all non-bleed images (logos, text) are 1/8" from die cut edge Non-bleed images should not be closer than  $\frac{1}{6}$ " to all card edges.



## **Specifications for Customer Supplied Artwork**

Software Applications	PLI's Prepress Department is Mac-based. We accept artwork created in most industry-standard software applications, including the current versions of <b>Adobe InDesign</b> , <b>Illustrator</b> and <b>Photoshop</b> . Please do not submit Microsoft Word, Excel, Power Point or Publisher files. High resolution PDFs are accepted – please make sure files include bleed. Also include a directional arrow in the design unless the keycard is RFID technology.
File Info & Formats	Please submit vector artwork whenever possible.
	If creating artwork in Photoshop, please submit layered, CMYK files. Resolution should be 300 at actual size.
	Do not send low resolution images from the Internet.
	Supply all necessary fonts and images. Package your documents to ensure everything is included.
	All type should be at least 6pt. in size. To be legible, reversed type should be at least 8pt.
	Artwork using PMS colors and Photoshop duotone files are accepted.
	Keep all non-bleed elements (logos, etc.) 1/8" inside all edges of the key card.
	Bleed, if applicable, should extend 1/8" beyond the edges of the card.
	All rules and outlines should be .5 pt. or greater.
	Spot colors can be converted to CMYK but cannot be guaranteed to match the specified PMS color when printed as process.
Artwork Emailing & FTP Instructions	Email attachments should be less than 10 Mb and can be emailed to your account rep. It is a good practice to compress your artwork files (Stuff or Zip).