# MATERIAL SPECIFICATIONS Hotel Key Cards



#### **Deliverables Needed**

Due: October 14

- Print ready artwork
  - o Max. file size 10 mb
  - O Detailed instructions continue on the following pages

#### **Submission Instructions**

Send all deliverables before or by the due date listed above to the RSNA sponsorship team at <a href="mailto:sponsors@rsna.org">sponsors@rsna.org</a>.

#### Questions


Please direct any questions to the RSNA sponsorship team at the email address listed above.



605 Sweeten Creek Industrial Park Asheville, NC 28803


> Ph: (800) 752-1017 Fax: (828) 418-8203 Email: info@plicards.com

#### **RFID**

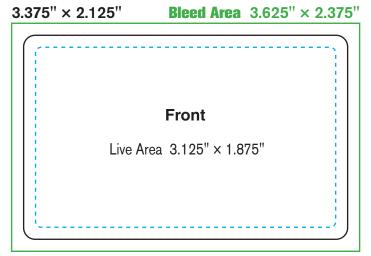

Please note that RFID keycards do not require a directional arrow.



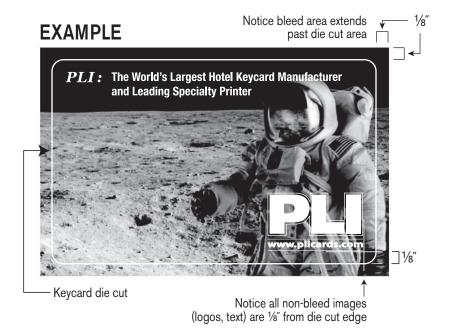

Non-bleed images should not be closer than 1/8" to all card edges.



605 Sweeten Creek Industrial Park Asheville, NC 28803 Ph: (800) 752-1017

> Fax: (828) 418-8203 Email: info@plicards.com

### **Specifications for Customer Supplied Artwork**

#### **Software Applications**

PLI's Prepress Department is Mac-based. We accept artwork created in most industry-standard software applications, including the current versions of **Adobe InDesign**, **Illustrator** and **Photoshop**. Please do not submit Microsoft Word, Excel, Power Point or Publisher files. High resolution PDFs are accepted – please make sure files include bleed. Also include a directional arrow in the design unless the keycard is RFID technology.

#### File Info & Formats

Please submit vector artwork whenever possible.

If creating artwork in Photoshop, please submit layered, CMYK files.

Resolution should be 300 at actual size.

Do not send low resolution images from the internet.

Supply all necessary fonts and images.

Package your documents to ensure everything is included.

All type should be at least 6pt. in size.

To be legible, reversed type should be at least 8pt.

Artwork using PMS colors and Photoshop duotone files are accepted.

Keep all non-bleed elements (logos, etc.) 1/8" inside all edges of the keycard.

Bleed, if applicable, should extend 1/8" beyond the edges of the card.

All rules and outlines should be .5 pt. or greater.

Spot colors can be converted to CMYK but cannot be guaranteed to match the specified PMS color when printed as process.

## Artwork Emailing & FTP Instructions

Email attachments should be less than 10 Mb.

It is a good practice to compress your artwork files (Stuff or Zip).